

AD2000

The AD 2000 auto-dialer provides remote telemetry notification of an alarm incident when used with either the Advantium Eight or Advantium Two alarm. The system may be customized to provide four separate voice or numeric messages. The AD 2000 lowers installation costs by using a common line, which is automatically captured in order to begin the dialing sequence. This makes CONCOA the ideal choice for automatic gas switchovers or gas blending systems in the laboratory, processing or metal fabrication industries.



Specifications

- **Programmable Functions**
 - Dial 1-8 phone numbers per alarm incident
 - 1-9 dialing attempts per phone number
 - Voice or numeric message
 - Repeat message 1-3 times per connection
 - Up to four separate input channels
 - Up to four prerecorded messages
- **Input Channels**
 - Four N.O. or N.C.
 - Dry contact or voltage activation
- **Dimensions**
 - 6"W x 4"L x 1½"D
- **Operating Temperature Range**
 - 0 to +130F (-18 to +55C)
- **Mounting Location**
 - Wall or flat surface

Ordering Information

Part Number	Description
529-5306	AD2000 auto-dialer for use with 575-001X, 575-002X, 5310 or 5311 remote alarms


Advantium Monitoring Software

Features

- Real Time Systems Monitoring
- Email Or Fax Notification
- 24/7 Data Log
- Rs-232 Format
- Program Flexibility

Specifications

- **Compatibility**
Windows 98, ME, NT, 2000, or XP
- **Interface**
RS-232 serial port
- **Email Function Requires Modem with Dial-up Connection or Network Card**

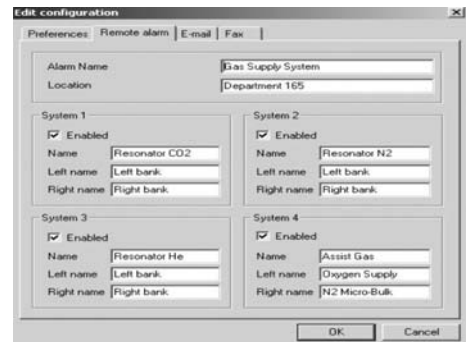

Ordering Information

Part Number	Description
529-5390	Advantium 8 RS232 Monitoring Software