wier obrotowe zawory membran.

awory membranowe z serii 533 s idealne do u ycia ako podstawow kontrola przep ywu gaz w o wysokie czysto ci oraz gaz w korozy a ek 0-90 stopniowy oraz niskie nawil anie powierzchni czy si zmnie szy zanieczyszczenie i unikn pu apki.

O roto a em mrano arter t rn diap ragm al e est a orem o s d ia a ac m a po o enie s lam e po o enie a or po c i ac one est r noleg do ier n pr ep po ac one t prestopad do drog pr ep

Materials and Specifications

Maximum Inlet Pressure	3500 PSIG (240 BAR)
Temperature Range	65°F to 150°F (18°C to 65°C)
Bodies and Fittings	Brass barstock, 316L Stainless steel or chrome-plated brass
Seats	PCTFE
Cv	0.13
Weight	0.66 lbs. (0.3 kg)

Installation Dimensions

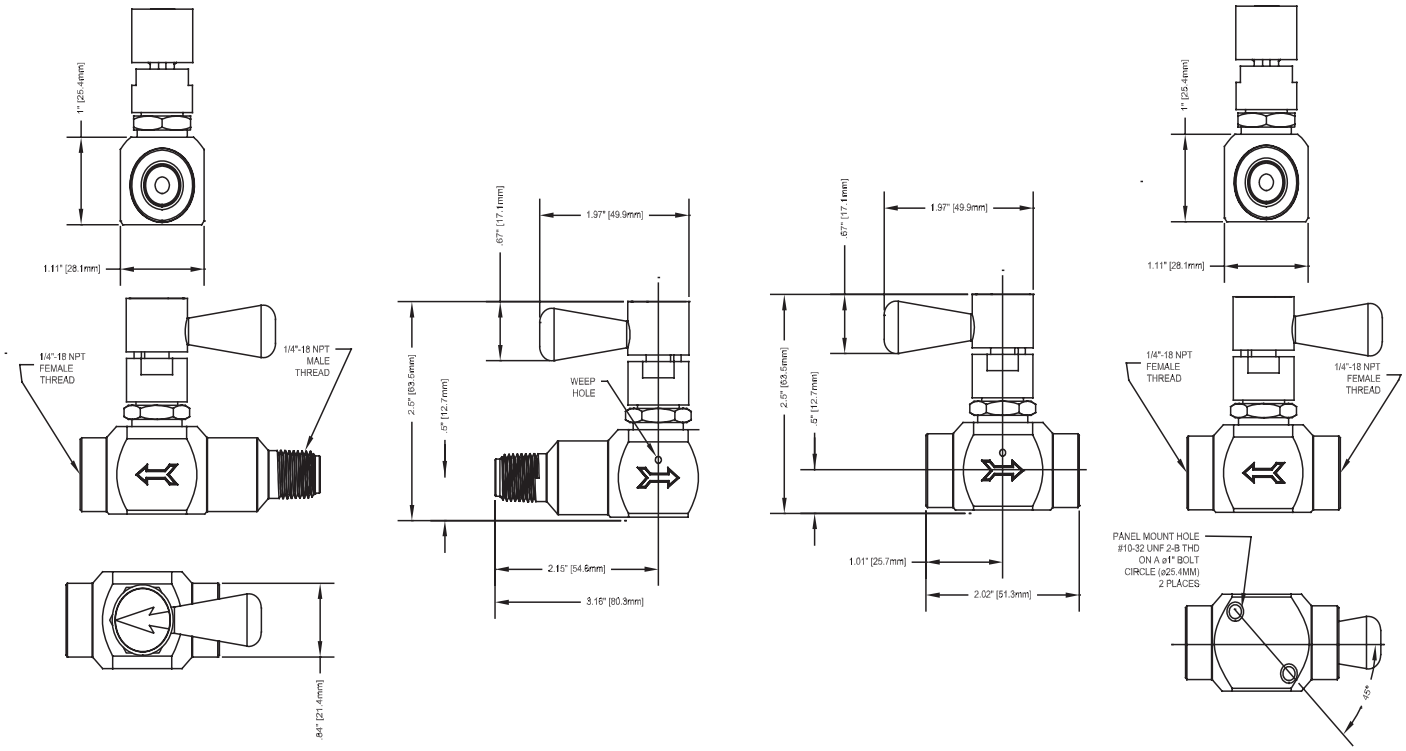

Ordering Information

Series	B	C	D
Series 533-4	Flow Direction	Material	Connection
	1: Quarter turn right to left	**2:** Brass	**0:** 1/4” FPT x 1/4” FPT
	3: Quarter turn left to right*	**4:** 316L stainless steel	**1:** 6mm tube fitting x 6mm tube fitting
	**Only for D=3, 7, 8, & 9*	**9:** Chrome-plated brass	**2:** 1/4" tube fitting x 1/4” tube fitting
			3: 1/4" MPT (extended leg) x 1/4” tube fitting
			4: 1/4" MPT x 1/4" MPT
			7: 1/4" MPT x 6mm tube fitting
			8: 1/4" MPT (extended leg) x 1/8” tube fitting
			9: 1/4" MPT (extended leg) x 1/4” FPT